


Assembly Instruction Sheet #IS-1068P28-7  
For Style 1068P28-7

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.  
**Light Source:** (7) E12 Candelabra Base Bulbs 60W Maximum(Not Include).  
**Estimated Assembly Time:** 15-30 minutes  
**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

**⚠Warnings and Cautions**

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.  
These instructions are provided for your safety. It is very important you read them completely before installing the fixture.  
We strongly recommend that a licensed, professional electrician perform the installation.  
Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

**Package Contents**

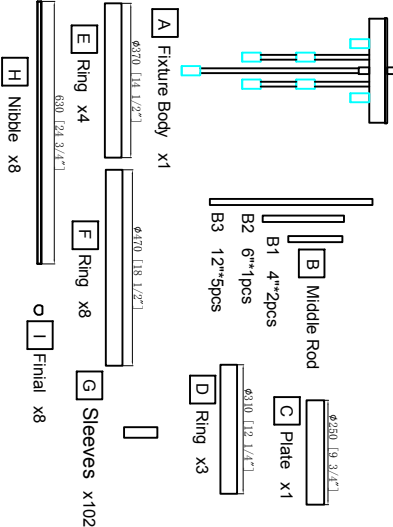

**Hardware Contents**

PART	DESCRIPTION	QUANTITY
AA	Decorative Caps	2pcs
BB	Electrical Nipples	2pcs
CC	Outlet Box Screw	2pcs
DD	Mounting Screw	2pcs
EE	Mounting bracket	1pcs



**STEP 1 – Install Ring to Fixture Body.**

A. Thread the Nibble(H) through the holes on the Plate (C) then fix it with the Final (I). Thread the Ring D, E, F and sleeves (G) through the Nibble (H) accordingly to the orders. (Please refer to the picture in the right side. And please keep the balance of sleeves(G) and the rigs.)  
B. Lose the screw on the top of Fixture Body (A), thread the Nibble (H) through the Fixture Body (A) and fix them with the nuts, cover the plate of Fixture Body(A) then tighten the screws on the top.

**(Step 1 Continued)**

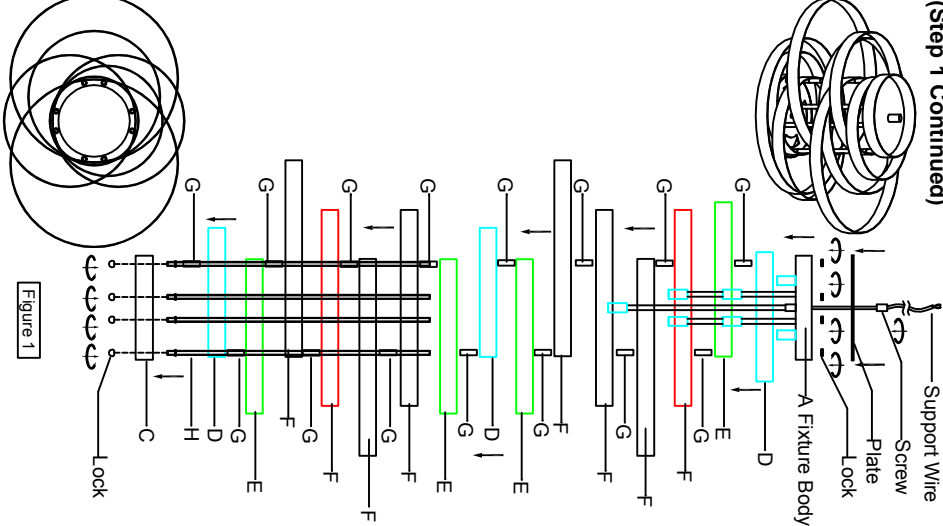


Figure 1